


SONY

VPL-PHZ61/51

3LCD Laser projectors

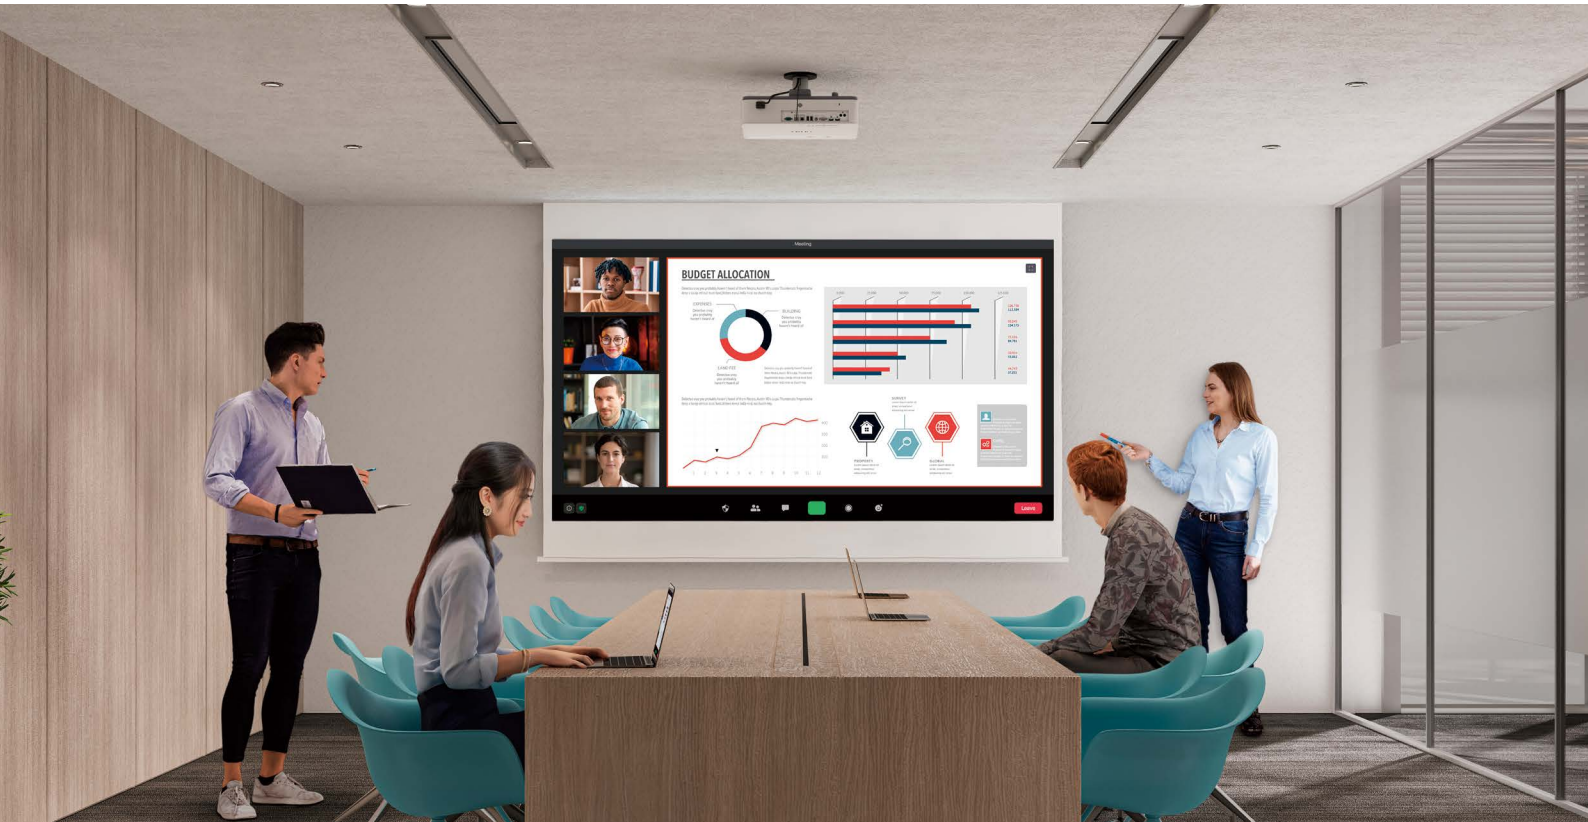

Beautifully slim and light with the smallest body in its class, the VPL-PHZ61/51 laser projectors combine outstanding picture performance with up to 7,000lm* center brightness and impressive reliability. With flexible installation options, minimal maintenance, and 4K 60P input support, these projectors are an ideal choice for today's integrated AV environments. *VPL-PHZ61

WUXGA

PHZ61 : 7,000lm (Center) 6,400lm

PHZ51 : 5,800lm (Center) 5,300lm



BrightEra™
Long Lasting Optics

Z-Phosphor
LASER LIGHT SOURCE

CHDBT™



pro.sony/projectors

Bold, rich color even in brightly lit rooms

Clearer images and text

Reality Creation uses powerful algorithms that boost image resolution closer to 4K-like quality. Reality Text improves visibility of characters: great for conference rooms, university seminar rooms and large classrooms.

For images



Reality Creation OFF



Reality Creation ON
Clearer image with more depth
Simulated images

For presentation materials

ep	Oct	Nov	Dec	Fluctuation	ALL
8.881	222.632	262.564	263.128		4455.510
1.089	18.866	33.999	58.457		829.831
1.958	52.599	14.619	7.920		538.070
1.422	66.561	50.126	49.577		677.680
1.684	45.217	26.525	24.551		493.314
1.169	21.306	46.792	65.019		511.122
1.830	12.148	49.696	8.679		657.284
1.729	5.935	40.806	48.924		748.210
1.840	31.805	37.509	37.590		636.501

Reality Text OFF

ep	Oct	Nov	Dec	Fluctuation	ALL
8.881	222.632	262.564	263.128		4455.510
1.089	18.866	33.999	58.457		829.831
1.958	52.599	14.619	7.920		538.070
1.422	66.561	50.126	49.577		677.680
1.684	45.217	26.525	24.551		493.314
1.169	21.306	46.792	65.019		511.122
1.830	12.148	49.696	8.679		657.284
1.729	5.935	40.806	48.924		748.210
1.840	31.805	37.509	37.590		636.501

Reality Text ON

Clearer letters and lines with enhance legibility
Simulated images

Bright, beautiful colors

Bright View is Sony's unique processing technology that brightens images while maintaining rich color – even in brightly-lit business and educational environments.



Bright View OFF



Bright View ON

Simulated images

Enhanced viewing experience

Sony's Intelligent Settings feature optimizes brightness, cooling system, and other projector settings to suit four usage environments. In addition, with Ambiance, our new built-in ambient light sensor, the projector measures a room's brightness and automatically adjusts color gain, Bright View mode, and Reality Creation settings to match the environment and enhance the viewing experience.

Ambiance includes an ambient light sensor




Location selection in Intelligent Settings

Meeting/Classroom




Clarity first

Museum



Color accuracy first

Entertainment




Vivid color first


Enjoy optimum pictures while saving energy

The VPL-PH261/51 make sound business sense, helping you reduce running costs in corporate and educational environments. A new Auto Light Output feature works in conjunction with Ambiance, optimizing image quality and maintaining high visibility while reducing power consumption.

Auto Light Output : Off

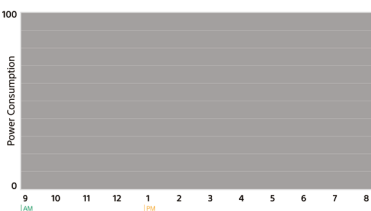

Auto Light Output : On

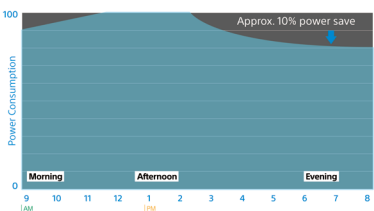

*The feature works in conjunction with Ambiance, optimizing image quality and maintaining high visibility while reducing power consumption.

4K 60P input support

Support for 4K 60P input signals makes life simpler when you're using the VPL-PHZ61/51 in multi-screen set-ups with flat panel sub-screens. Just split the same 4K signal to drive all your display devices with no conversion needed. There's also a high-performance image scaler that effortlessly converts 4K input signals to WUXGA resolution while achieving close to 4K image quality. Now optimized for 4K60P signals, Reality Creation is Sony's unique picture enhancement feature that gives projected images even greater crispness and depth. There's also support for devices with content protection such as 4K UHD players.




Smart, installation friendly design

Enjoy flexible installation options with a generous +55% vertical lens shift range, making it easy to achieve perfectly-proportioned pictures without long pole mounts or keystone correction when the projector is ceiling mounted. We've also widened the throw ratio range, simplifying replacement of a previously installed projector without the hassle of re-positioning an existing ceiling mount.

Brighter for longer with less maintenance


Designed with intelligence

Intelligent Settings simplifies installation and maximizes performance based on usage, image detail, color richness and fidelity, light output, cooling level and output noise. The Meeting/Classroom function controls laser output to keep brightness as high as possible for years of real-world use.

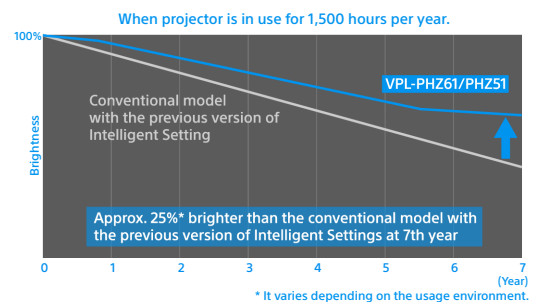

Keep dust out of the picture

The projector's laser light source is sealed to prevent dust accumulation and eliminate reduced brightness. The dedicated cooling duct structure for the projector's 3LCD panels is covered with an air filter to prevent dust from entering.

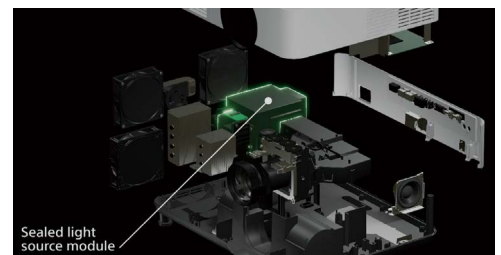

Hassle-free filter care

Focus on great-looking images instead of time-consuming maintenance. A new filter material makes routine filter changes unnecessary for general use in classrooms and meeting rooms.* For heavier use in dusty environments there's a new clogging sensor to advise when filter replacement is needed.

* Dust density < 0.03mg/m3 and operating time < 10,500 hours. (1,500 hours/year over 7 years.)

Other Features

Data Cloning

Settings for one projector can be copied to other projectors using a USB memory drive. This greatly simplifies installation and set-up of multiple projectors.


Auto Input Select

The Auto Input Select feature automatically selects an active signal input, so there's no need to change input each time a device is connected to the projector.

Auto Power on

Connect the VPL-PHZ61/51 to a switched-on computer, and the projector turns on automatically, without having to operate the power button.

Connector Panels

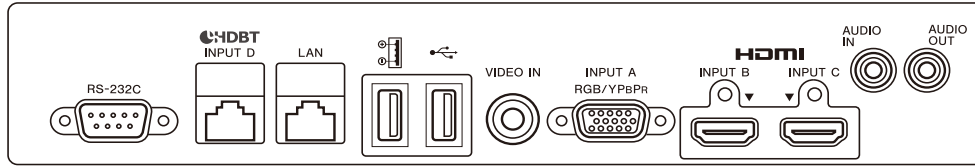

Specifications

		VPL-PH261	VPL-PH251
Display system		3 LCD system	
Display device	Size of effective display area	0.64" (16.3 mm) x 3 BrightEra LCD Panel, Aspect ratio: 16:10	
	Number of pixels	6,912,000 (1920 x 1200 x 3) pixels	
Projection lens	Zoom	Manual (Approx. x 1.6)	
	Focus	Manual	
	Lens shift	Manual, Vertical: -35% to +55%, Horizontal: +/- 15%	
	Throw ratio	1.23:1 to 1.97:1	
Light source		Laser diode	
Filter cleaning maintenance / replacement cycle (Max.)*1		Auto detecting (by clogging sensor)	
Screen size		40" to 300" (1.02 m to 7.62 m) (measured diagonally)	
Light output (Mode: Standard / Middle)*2		6,400 lm*3, 7,000 lm (Center)*4 / 4,700 lm	5,300 lm*3, 5,800 lm (Center)*4 / 4,000 lm
Color light output (Mode: Standard / Middle)*2		6,400 lm / 4,700 lm	5,300 lm / 4,000 lm
Contrast ratio (full white / full black)*2		∞ : 1	
Speaker		16 W	
Displayable scanning frequency	Horizontal	15 kHz to 92 kHz	
	Vertical	24 Hz to 92 Hz	
Accepted signal resolution	Computer signal input	Maximum signal resolution: 1920 x 1200 *5	
	Video signal input	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p, 3840/60p, 3840/30p, 3840/25p, 3840/24p, 4096/60p, 4096/30p, 4096/25p, 4096/24p	
Keystone correction (Max.)		Horizontal: +/- 30 degrees Vertical: +/- 30 degrees	
OSD language		27-language (English, French, German, Italian, Spanish, Portuguese, Japanese, Chinese, Korean, Russian, Dutch, Norwegian, Swedish, Thai, Arabic, Turkish, Polish, Vietnamese, Farsi, Finnish, Indonesian, Hungary, Greek, Czech, Slovakia, Romania)	
Input / Output (Computer / Video / Audio / Control)	INPUT A	RGB / Y PB PR input connector: Mini D-sub 15 pin (female), Audio input connector: Stereo mini jack	
	INPUT B	HDMI input connector: HDMI 19-pin, Digital RGB/Y PB PR, HDCP support, Audio input connector: HDMI audio support	
	INPUT C	HDMI input connector: HDMI 19-pin, Digital RGB/Y PB PR, HDCP support, Audio input connector: HDMI audio support	
	INPUT D	HDBaseT interface connector: RJ45, 4 play (Video, Audio, LAN, Control)	
	VIDEO IN	Video input connector: Phono jack (Composite), Audio input connector: Shared with INPUT A	
	OUTPUT	Audio output connector: Stereo mini jack	
	REMOTE	D-sub 9-pin (male) / RS232C	
	LAN	RJ45, 10BASE-T / 100BASE-TX	
	USB	TYPE-A x 1 (for F/W update), TYPEA for Power supply	
		37 dB / 34 dB	35 dB / 32 dB
Acoustic Noise (Mode: Standard / Middle)*2			
Operating temperature (Operating humidity)		0°C to 40°C (32°F to 104°F) / 20% to 80% (no condensation)	
Storage temperature (Storage humidity)		-10°C to +60°C (14°F to +140°F) / 20% to 80% (no condensation)	
Power requirements		AC 100 V to 240 V, 4.7 A to 2.0 A, 50 Hz / 60 Hz	
Power consumption (Mode: Standard)	AC 100 V to 120 V	463 W	
	AC 220 V to 240 V	434 W	
Power Consumption (Standby Mode)	AC 100 V to 120 V	0.5 W (when "Standby mode" is set to "Low")	
	AC 220 V to 240 V	0.5 W (when "Standby mode" is set to "Low")	
Power Consumption (Networked Standby Mode)	AC 100 V to 120 V	1 W (LAN), 21 W (ALL Terminals and Networks Connected / exclude USB Device and speaker off, when "Standby Mode" is set to "Standard")	
	AC 220 V to 240 V	1 W (LAN), 21 W (ALL Terminals and Networks Connected / exclude USB Device and speaker off, when "Standby Mode" is set to "Standard")	
Standby Mode / Networked Standby Mode Activated		Approx. 2 minutes	
Dimensions (W x H x D) (without dust filter, protrusions)		Approx. W 422 x H 100 x D 333 mm (16 5/8 x 3 15/16 x 13 1/8 inches)	
Mass		Approx. 7.0 kg (15 lb)	Approx. 6.8 kg (15 lb)
Supplied accessories		RM-PJ8 Remote Commander (1), Lithium battery (CR2025) (1), AC Power Cord (1), Setup Guide (1)	

*1 This figure is the expected maintenance time, not a guaranteed time. The actual value depends on the environment and how the projector is used.

*2 The figures are approximate. They vary depending on the environment or how the projector is used.

*3 The value is in accordance with ISO 21118, and may differ depending on the actual unit. Brightness and contrast vary depending on use conditions and environments.

*4 The value is light output measured at center area of screen in Standard mode, and average of all products shipped.

*5 Available for VESA Reduced Blanking signal.

For other countries/regions
IEC 60825-1:2014 CLASS 1 LASER PRODUCT



As with any bright light source,
do not stare into the beam,
RG2 IEC 62471-5:2015.

©2022 Sony Corporation.

Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. The values for mass and dimension are approximate. "SONY" is a registered trademark of Sony Group Corporation.

"Z-Phosphor" and "Remote Commander" are trademarks of Sony Corporation. "BrightEra" is a registered trademark or a trademark of Sony Group Corporation or its affiliates. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

HDBaseT™ and the HDBaseT Alliance logo are the trademarks of the HDBaseT Alliance.

All other trademarks are the property of their respective owners. Please visit Sony's professional website or contact your Sony representative for specific models available in your region.

MK22002V1YIT22SEP